


Außenläufer-BLDC-Motor

RB-1806-CE

Anwendungen: Drohnen, Miniatur-Luftpumpen, Handventilatoren und Smart-Home-Geräte

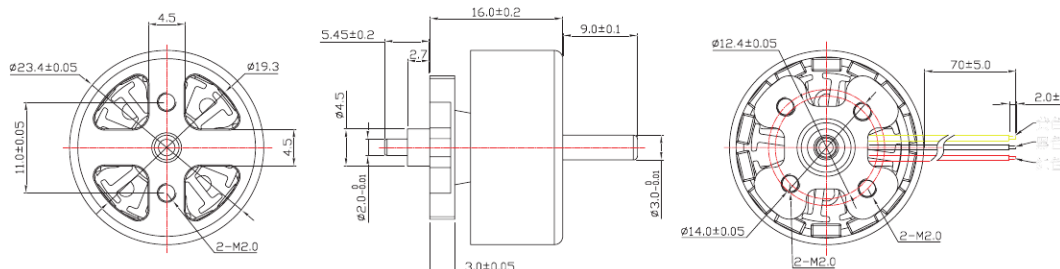

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-1806-CE-N-01	5.0V-8.4V	7.4V CONSTANT	18300	0.5	15555	4.99	167.6	16.4	26.73	73.2	1117.1	109.5
RB-1806-CE-N-02	5.0V-13.1V	11.1V CONSTANT	18150	0.35	15428	3.9	191	18.7	30	70	1272	124.7
RB-1806-CE-N-03	5.0V-8.4V	7.4V CONSTANT	21573	0.337	19313	2.88	88.4	8.7	17.9	84	843	82.6
RB-1806-CE-N-04	5.0V-13.1V	11.1V CONSTANT	22747	0.45	20184	3.56	154	15	32.5	82	1367	134

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

