
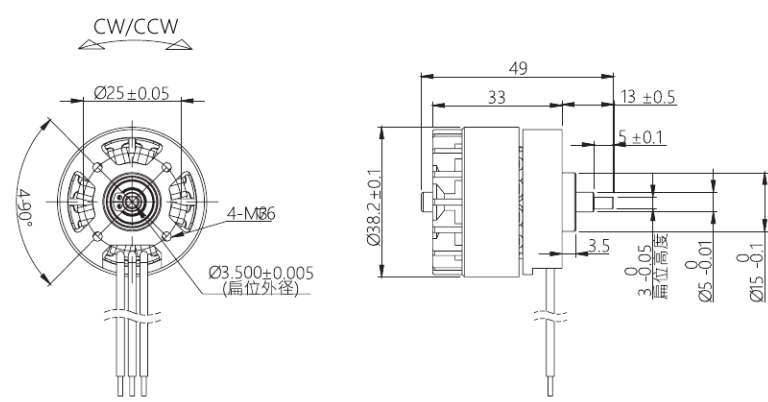


Außenläufer-BLDC-Motor

RB-3711-CE

Anwendungen: Industriedrohnen, Hochdruckreiniger und intelligente Modellboote

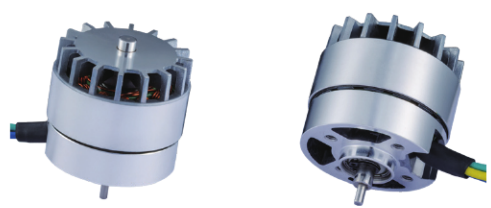

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-3711-CE-N-01	18.0-26.0V	21.6V CONSTANT	26500	2.5	21500	18	1275	125	230	73	3379.67	331.34
RB-3711-CE-N-02	18.0-26.0V	18.0V CONSTANT	22000	2	18000	13.5	1000	98	185	76	2805	275
RB-3711-CE-N-03	12.0V-26.0V	12.0V CONSTANT	22000	3	18000	20.3	1000	98	185	76.34	2805	275
RB-3711-CE-N-04	18.0V-26.0V	24.0V CONSTANT	22000	1.5	18000	10.1	1000	98	185	76.71	2805	275

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

