


Bürstenloser Gleichstrommotor (BLDC)

RB-2838-68

Anwendungen: Elektrische Vorhänge, Vakuumpumpen und Elektrowerkzeuge

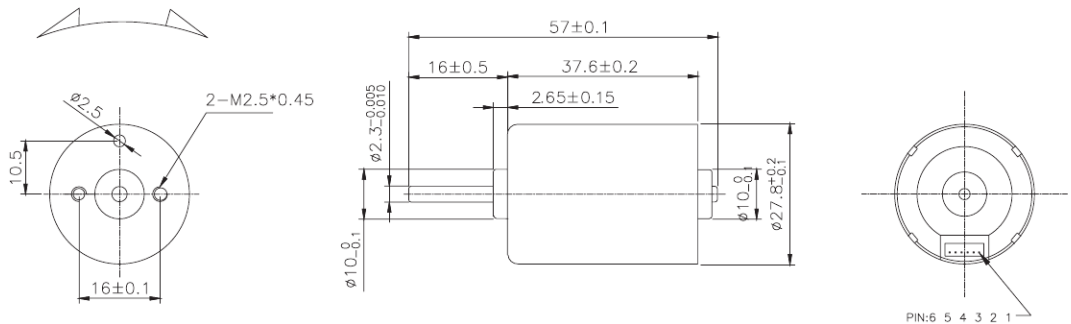

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-2838-68-N-01	3.5V-4.2V	3.7V CONSTANT	7800	0.29	6788	1.95	76	7.45	5.3	73	585	57.35
RB-2838-68-N-02	9.0V-14.0V	12.0V CONSTANT	3570	0.04	2911	0.18	50.7	4.97	1.5	71.3	274.6	26.92
RB-2838-68-N-03	19V-26.0V	24.0V CONSTANT	6370	0.1	4845	0.31	103.7	10.17	5.1	67.6	433.3	42.48
RB-2838-68-N-04	6.0V-12.0V	7.2V CONSTANT	5000	0.18	4500	0.85	100.062	9.81	4.63	72	576.3	56.5

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

