


Bürstenloser Gleichstrommotor (BLDC)

RB-4115-C8

Anwendungen: Beatmungsgeräte, Sauerstoffkonzentratoren und Pumpen

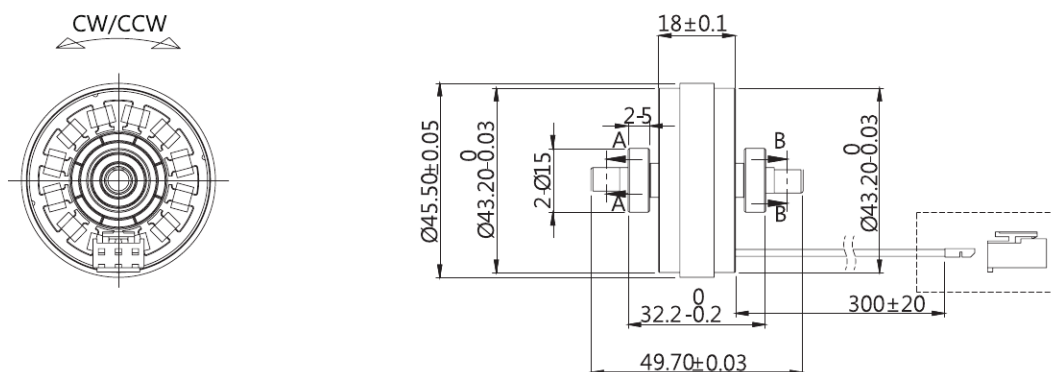

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY							STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF		TORQUE	
			rpm	A	rpm	A	g.cm	mN-m				g.cm	mN-m
RB-4115-C8-N-01	9.0V-16.0V	12.0V CONSTANT	2600	0.16	2100	1.5	663	65	15	79		4875	479
RB-4115-C8-N-02	9.0V-16.0V	13.0V CONSTANT	2800	0.2	2300	1.6	714	70	17	80		5283	518
RB-4115-C8-N-03	6.0V-26.0V	18.0V CONSTANT	2600	0.13	2100	1	663	65	15	80.57		4875	479
RB-4115-C8-N-04	6.0V-26.0V	24.0V CONSTANT	2600	0.14	2100	0.75	663	65	15	79.58		4875	479

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

