


Bürstenbehafteter Gleichstrommotor (DC)

RS-3650ST

Anwendungen: Autositzverstellungen, elektronische Drosselklappen und Hochleistungspumpen

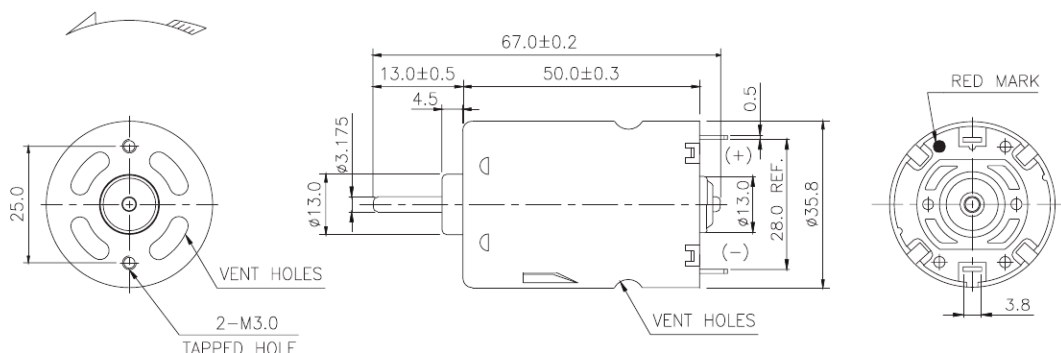

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-36503ST-7517	3.0-7.2	6.0V CONSTANT	21900	2.4	18250	12	243	23.82	45.6	63.3	1460	143.14
RS-36503ST-5042	6.0-12.0	12.0V CONSTANT	18000	1	15302	5.7	311	30.49	48.9	71.5	2076	203.53
RS-36505ST-6013	6.0-12.0	12.0V CONSTANT	31500	2.6	26420	13.5	381	37.35	103	63.8	2363	231.67
RS-36505ST-2585	12.0-36.0	24.0V CONSTANT	9400	0.18	8040	1.06	227	22.25	18.7	73.5	1567	153.63

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

