
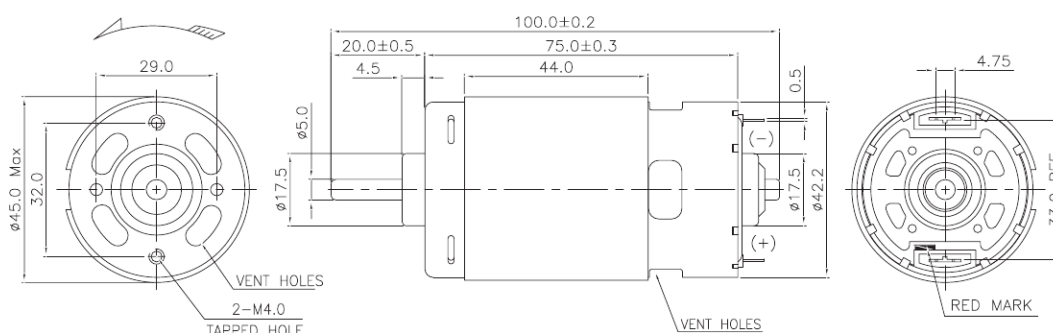


Bürstenbehafteter Gleichstrommotor (DC)

RS-42755DT

Anwendungen: Gewerbliche Kaffeemaschinen, Küchenmixer und Hochleistungs-Elektrowerkzeuge

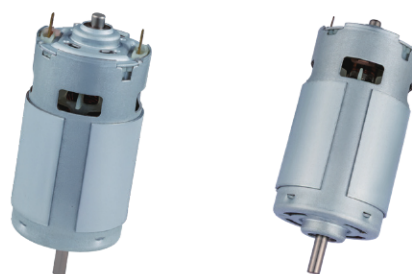

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT W	EFF %	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m			g.cm	mN-m
RS-42755DT-8513	6.0-18.0	18.0V CONSTANT	20000	2.5	17692	19.2	1282	125.69	233	67.3	11111	1089.31
RS-42755DT-8511	6.0-18.0	18.0V CONSTANT	25000	2.9	21892	20.4	1243	121.86	279	76.0	10000	980.39
RS-42755DT-5635	21.0-27.0	24.0V CONSTANT	10500	0.6	9172	4.1	738.174	72.37	69.5	69.83	5834.91	572.05
RS-42755DT-4546	21.0-27.0	24.0V CONSTANT	8200	0.4	6988	2.3	606.39	59.45	43.5	78.53	4101.114	402.07

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

