


Bürstenbehafteter Gleichstrommotor (DC)

RS-4266CT

Anwendungen: Netzteilfreie Küchengeräte wie Entsafter, Kaffeemühlen und Mixer

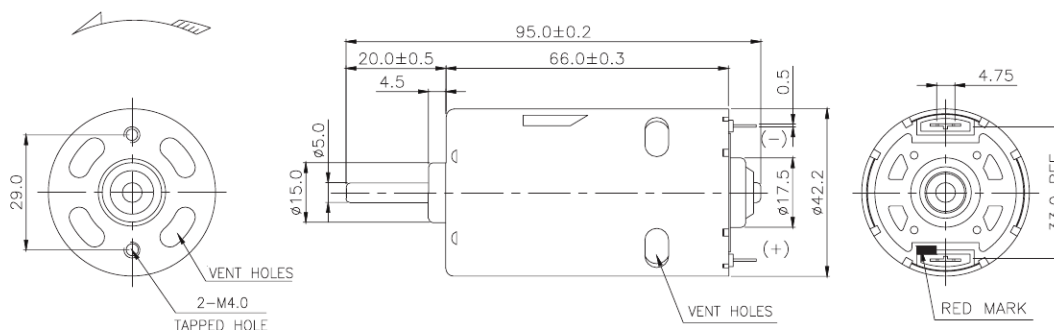

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-4266CT-10220	100-120	110V CONSTANT	5100	0.035	4059	0.14	219	21.47	9.1	56.5	1074	105.29
RS-4266CT-1790	100-120	120V CONSTANT	14000	0.12	11677	0.6	465	45.59	55.7	77.4	2800	274.51
RS-4266CT-12180	100-230	230V CONSTANT	13600	0.08	10865	0.32	476	46.67	53	72	2365	231.86
RS-4266CT-14140	100-230	230V CONSTANT	17000	0.1	13864	0.45	570	55.88	81.1	78.4	3091	303.04

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

