


Bürstenbehafteter Gleichstrommotor (DC)

RS-3640ST

Anwendungen: Verkaufsautomaten-Dosiermechanismen, Membran-Luftpumpen und Haushaltsgeräte

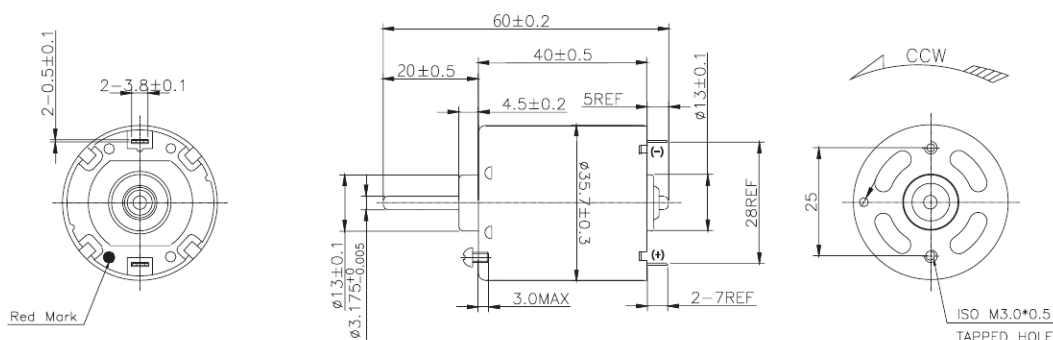

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-36403ST-15180S	6.0-36.0	24.0V CONSTANT	5700	0.11	4613	0.39	118	11.57	5.59	63	688	67.45
RS-36403ST-2480	6.0-36.0	12.0N CONSTANT	6450	0.42	5131	0.96	136	13.33	7.15	64	727	71.27
RS-36403ST-15245	12.0-36.0	24.0V CONSTANT	4000	0.06	3305	0.27	116	11.37	3.93	64	666	65.29
RS-36403ST-22125	6.0-24.0	12.0N CONSTANT	4000	0.2	3226	0.59	127	12.45	4.2	60	704	69.02

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

