
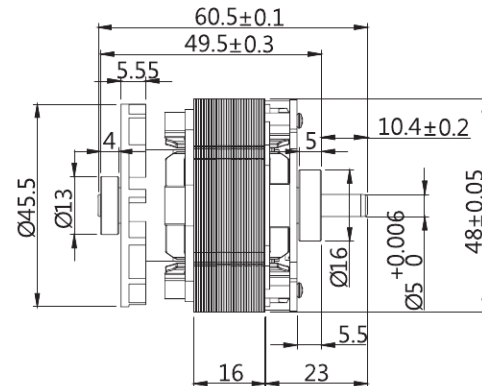


Bürstenloser Gleichstrommotor (BLDC)

RB-4816-CE

Anwendungen: Elektrowerkzeuge, Mixer und Gartengeräte

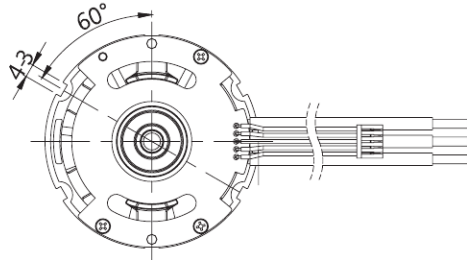

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY							STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT		EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W		%	g.cm	mN-m
RB-4816-CE-N-01	24.0V-40.0V	36.0V CONSTANT	24500	1.2	18500	10.5	1735	170	330		85	27250	2672
RB-4816-CE-N-02	12.0V-21.0V	18.0V CONSTANT	25000	3.8	19100	30	2284	224	448		83	26800	2628
RB-4816-CE-N-03	12.0V-26.0V	24.0V CONSTANT	25000	3.2	18500	20	1735	170	330		70.95	27250	2672
RB-4816-CE-N-04	12.0V-26.0V	24.0V CONSTANT	24500	1.32	18500	18	1735	170	330		85	27250	2672

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

