


Bürstenloser Gleichstrommotor (BLDC)

RB-4160-68

Anwendungen: Küchenmaschinen, Zentrifugen, Bürodruker, Standheizungen und Pumpen

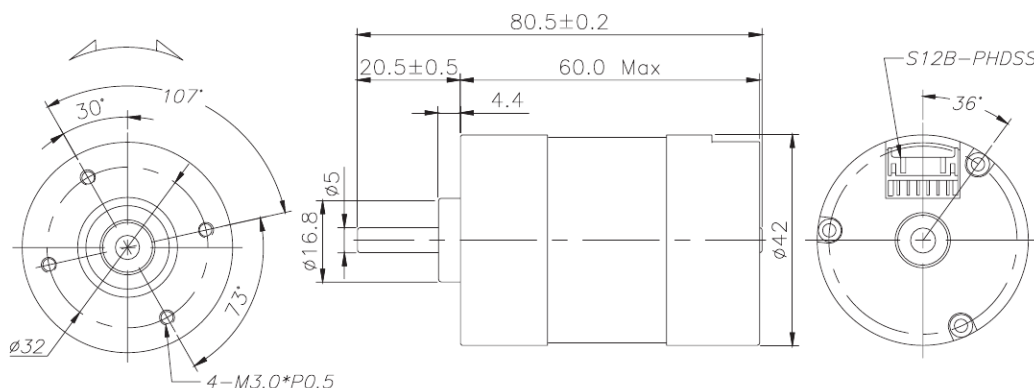

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-4160-68-N-01	12.0V-26.0V	24.0V CONSTANT	3998	0.23	3406	1.32	748	73.33	26.17	82.3	5052.8	495.37
RB-4160-68-N-02	12.0V-26.0V	24.0V CONSTANT	4150	0.22	3587	1.6	827	81.08	30.5	79.28	6102.9	598.32
RB-4160-68-N-03	12.0V-26.0V	12.0V CONSTANT	4000	0.42	3240	2.9	800	78.43	22.07	77.31	412.91	40.48
RB-4160-68-N-04	12.0V-26.0V	24.0V CONSTANT	5800	0.34	5100	1.4	500	49	33.48	79.21	406.28	39.83

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

