
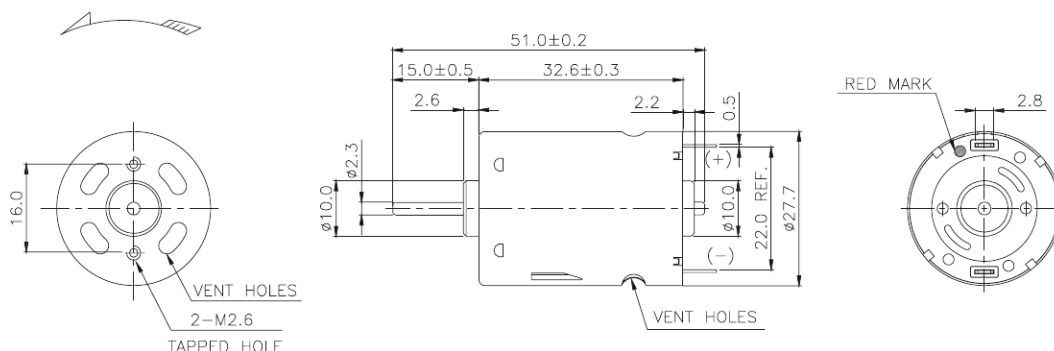


Bürstenbehafteter Gleichstrommotor (DC)

RS-2833ST

Anwendungen: Autowaschpumpen, Hochgeschwindigkeits-Haartrockner, Staubsauger und Massagesysteme

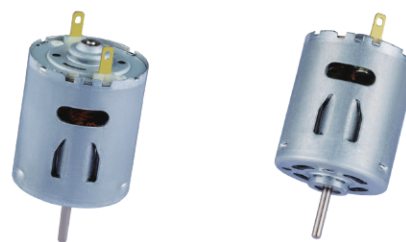

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-28333ST-2585	6.0-12.0	6.0V CONSTANT	10500	0.3	8555	1.32	58.9	5.77	5.17	65.2	318	31.18
RS-28333ST-3166	6.0-14.4	12.0V CONSTANT	25000	0.46	20929	2.37	81.4	7.98	17.5	61.5	500	49.02
RS-28335ST-16120	9.0-16.0	12.0V CONSTANT	8200	0.15	6378	0.4	51.2	5.02	3.35	65	230.2	22.57
RS-28335ST-13150	24.0-48.0	36.0V CONSTANT	18500	0.15	15072	0.66	92.65	9.08	14.32	60	500	49.02

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

