


Bürstenloser Gleichstrommotor (BLDC)

RB-5740-68

Anwendungen: Robotik, intelligente Rasenmäher, Zentrifugen und Küchenmaschinen

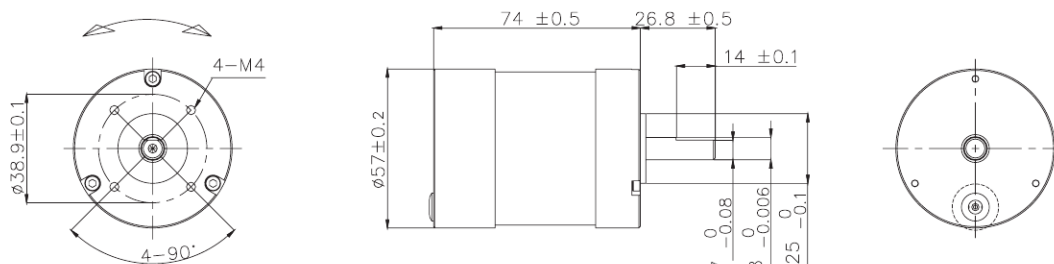

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-5740-68-N-01	6.0-15.0V	12.0V CONSTANT	2550	0.38	2370	3.05	131.3	12.87	65	83.8	1445.6	141.73
RB-5740-68-N-02	8.0-26.0V	24.0V CONSTANT	4980	0.62	4524	6.15	265.1	25.99	125.7	85.1	2895.3	283.85
RB-5740-68-N-03	18.0-26.0V	24.0V CONSTANT	6000	0.6	5250	2.2	700	68.63	49	73	2800.82	274.59
RB-5740-68-N-04	18.0V-26.0V	18.0V CONSTANT	6000	0.67	5250	2.64	700	68.63	49	73	2800.82	274.59

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

