


Bürstenbehafteter Gleichstrommotor (DC)

RS-4260DT

Anwendungen: Elektrische Vorhänge, Massagegeräte, automatische Wasserspender und Kompressoren

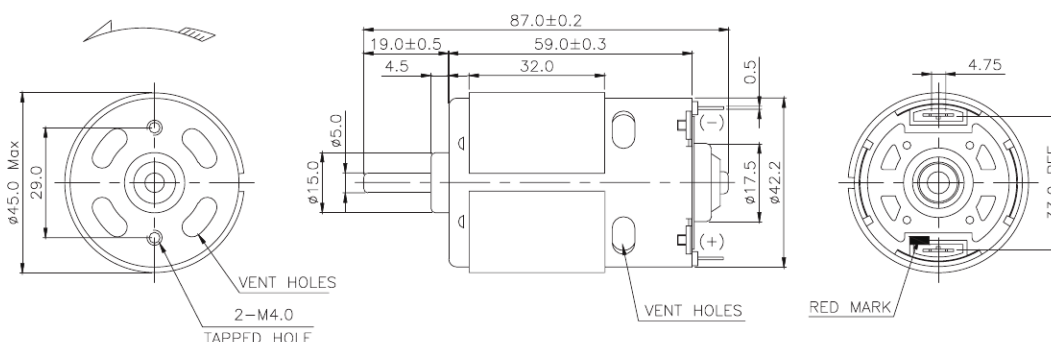

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m			g.cm	mN-m
RS-42603DT-5648	6.0-18.0	12.0V CONSTANT	10300	1.3	8580	10.6	880	86.27	77.5	60.8	5280	517.65
RS-42603DT-31150	18.0-36.0	24.0V CONSTANT	6500	0.4	5423	2	598	58.63	33.3	69.4	3611	354.02
RS-42605DT-7018	9.0-14.4	12.0V CONSTANT	13200	1.55	11354	9.5	710	69.61	82.7	72.5	5077	497.75
RS-42605DT-4046	12.0-30.0	24.0V CONSTANT	10400	0.6	8953	3.7	579	56.76	53.2	60.0	4160	407.84

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

