


Außenläufer-BLDC-Motor

RB-4817-CE

Anwendungen: Geldautomaten, Verkaufsautomaten, Bürodruckgeräte und Aktenvernichter

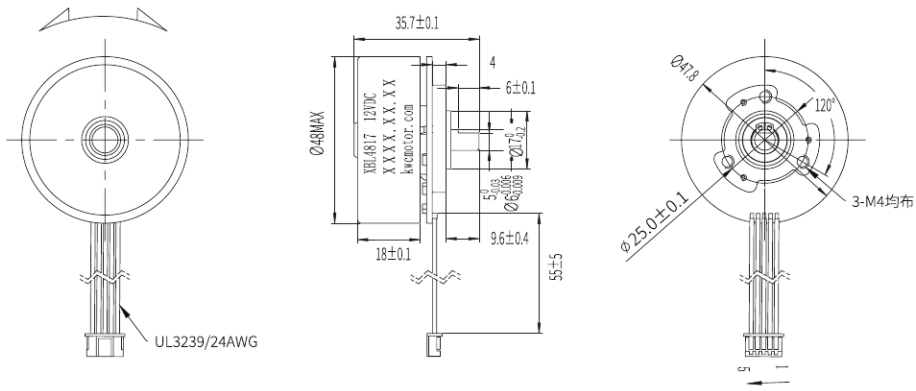

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-4817-CE-N-01	9.0-16.0V	12.0V CONSTANT	3200	0.25	2857	2.72	882.3	86.5	25.8	79.1	11174.1	1095.5
RB-4817-CE-N-02	18.0-26.0V	24.0V CONSTANT	4000	0.18	3570	1.58	818.04	80.2	30	80.8	9931.74	973.7
RB-4817-CE-N-03	6.0V-26.0V	6.0V CONSTANT	4000	0.72	3570	6.5	818.04	80.2	30	80.8	9931.74	973.7
RB-4817-CE-N-04	6.0V-26.0V	18.0V CONSTANT	4000	0.23	3570	2	818.04	80.2	30	80.8	9931.74	973.7

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

