


Bürstenloser Gleichstrommotor (BLDC)

RB-2415-9C

Anwendungen: Medizinische Mikropumpen, elektrische Ventile, Haartrockner, Massagegeräte, Luftpumpen, Wasserpumpen und Vakuumpumpen

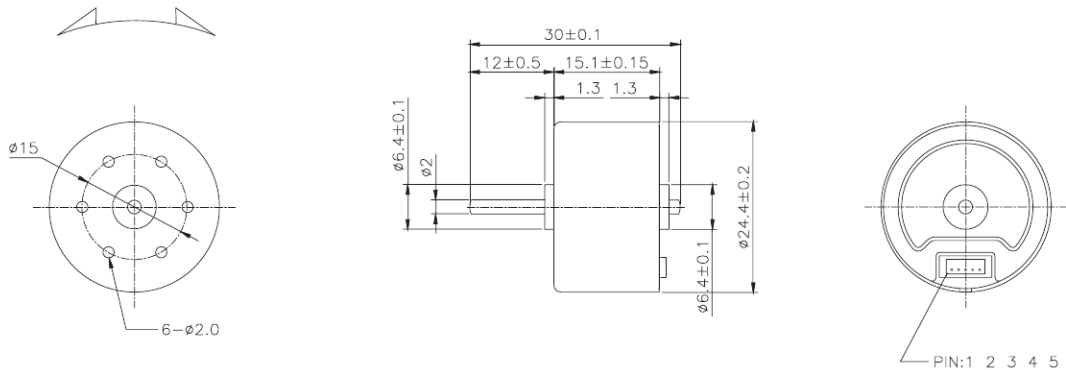

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RB-2415-9C-N-01	4.5V-6.0V	4.8V CONSTANT	3100	0.07	2276	0.18	17.1	1.68	0.4	46.22	65	6.38
RB-2415-9C-N-02	9.0V-16.0V	12.0V CONSTANT	6200	0.05	4975	0.18	20.4	2	1.04	48.24	103	10.1
RB-2415-9C-N-03	6.0V-12.0V	7.2V CONSTANT	3100	0.06	2276	0.14	17.1	1.68	0.4	46.22	65	6.38
RB-2415-9C-N-04	9.0V-24.0V	18.0V CONSTANT	6200	0.04	4975	0.14	20.4	2	1.04	48.24	103	10.1

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

