


Bürstenbehafteter Gleichstrommotor (DC)

RS-3657ST

Anwendungen: Elektronische Parkbremsen (EPB), handgeführte Elektrowerkzeuge und Pumpen

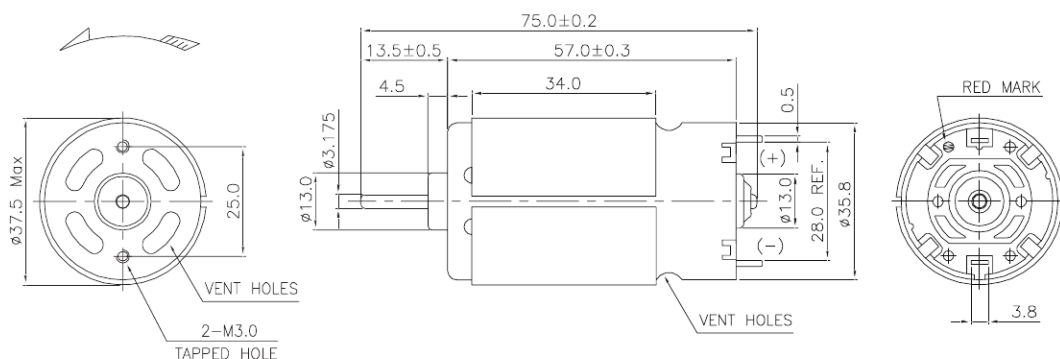

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-36573ST-7030	3.0 -12.0	4.8V CONSTANT	6300	0.9	5490	6.1	365	35.78	20.6	70.5	2835	277.94
RS-36573ST-6035	12.0-18.0	18.0V CONSTANT	21400	0.84	18854	6.22	443	43.43	85.7	76.5	3722	364.90
RS-36575ST-5016	6.0-12.0	12.0V CONSTANT	18000	1.2	15224	6.6	372	36.47	58.2	73.5	2432	238.43
RS-36575ST-2774	12.0-36.0	24.0V CONSTANT	7800	0.19	6758	1.23	301	29.51	20.9	70.7	2252	220.78

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

