


Bürstenbehafteter Gleichstrommotor (DC)

RS-3650CS

Anwendungen: Haartrockner, Haushaltsnähaschinen und Handstaubsauger

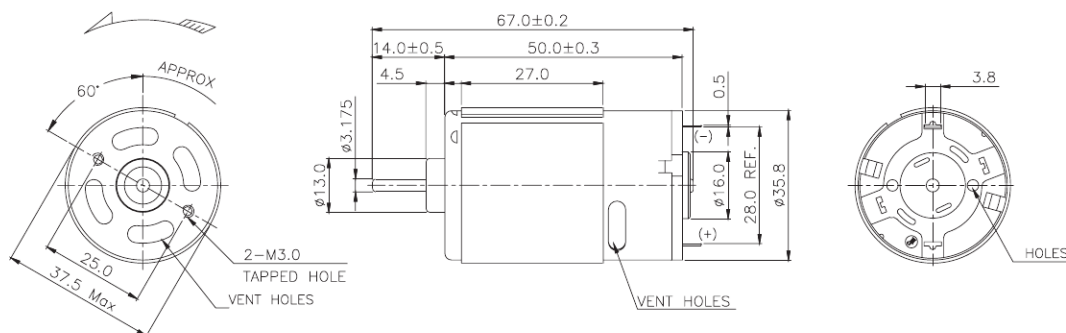

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			rpm	A	rpm	A	g.cm	mN-m	W	%	g.cm	mN-m
RS-3650CS-09220	100-120	110V CONSTANT	8200	0.025	6460	0.091	100	9.80	6.63	66.2	471	46.18
RS-3650CS-12120	100-120	120V CONSTANT	18000	0.06	15270	0.35	218	21.37	34.20	72	1440	141.18
RS-3650CS-08250	100-220	220V CONSTANT	15000	0.025	12800	0.145	183	17.94	24.00	75.2	1250	122.55
RS-3650CS-06450	100-240	230V CONSTANT	8500	0.015	6700	0.06	135	13.24	9.30	67.4	638	62.55

Wellenüberstand, Leistungsdaten und EMV-Maßnahmen kundenspezifisch. Details auf Anfrage.

